


REVISIONS				
REV.	DESCRIPTION	ECN#	DATE	DRAWING
A	NEW ISSUE		16/1/25	
B	标签内容修改		17.6.21	

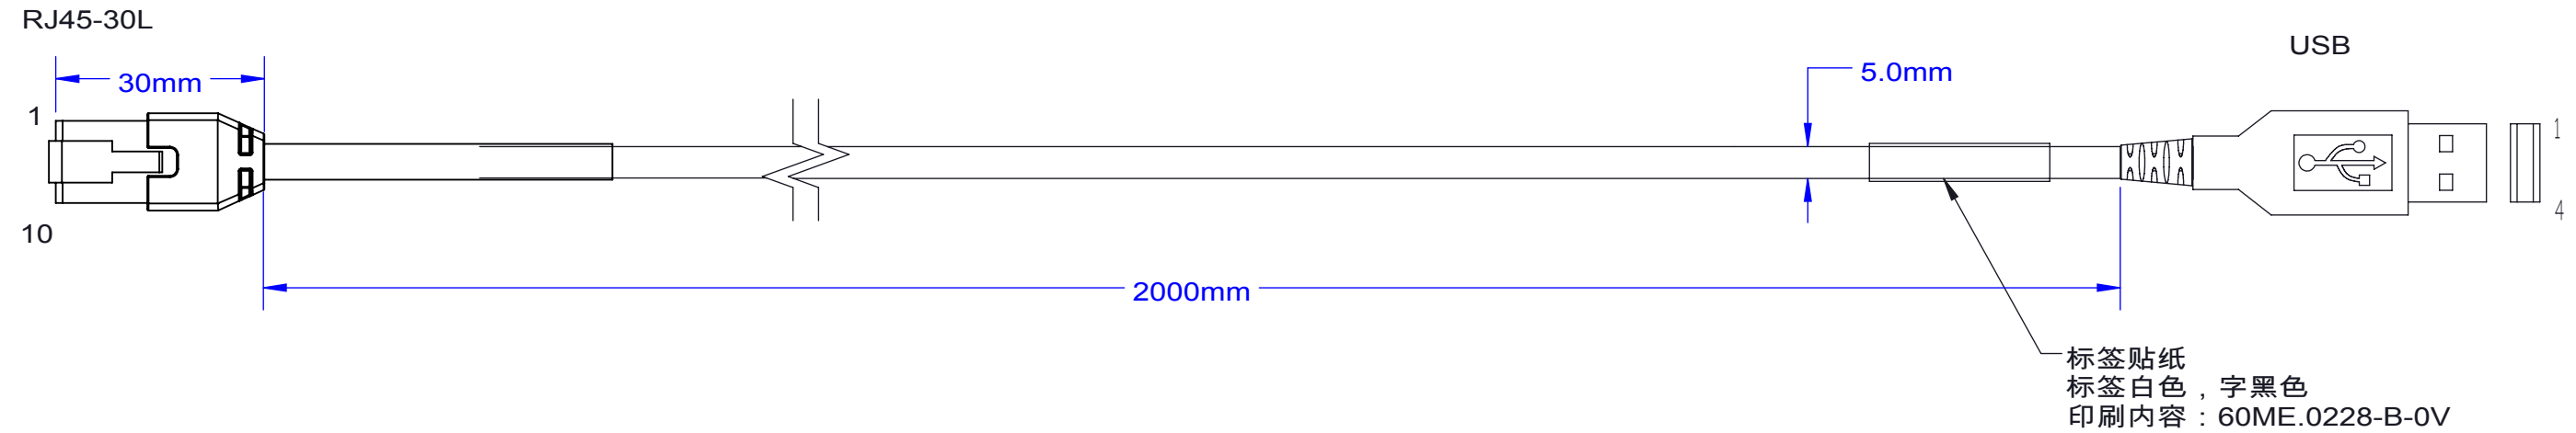

RJ45	USB	SIGNAL SCANNER REF
1	Shield	Shield
2	NA	NA
3	NA	NA
4	1	VIN +5V
5	NA	NA
6	NA	NA
7	NA	NA
8	4	GND
9	3	USB_P
10	2	USB_N

电性能：

1. 每根线都必须进行导通全检
2. 绝缘强度：最小 300VDC/sec
3. 绝缘电阻：DC 300V 最小10兆欧

备注：

1. cable颜色：黑色
2. 芯线规格26AWG 19股，芯线直径0.95mm
3. 内部芯线的两根信号为双绞线，芯线外部包裹锡包线
4. Cable内部填充细棉线，增强抗拉能力
5. 线径5mm
6. 扎带固定，PE袋包装

DRAWN XX	DATE XX	UNLESS OTHERWISE NOTED, TOLERANCES: DIM. .XX ± .25 .XXX ± .13 ANGLES ± 1/2deg DIM'S = MILLIMETERS	SUPERMAX		
CK/DES XXX	DATE XXX				
PROD XXXX	SCALE 1:1		SHEET 1 OF 1	NUMBER 60ME.0228-B-0V	
TITLE RJ45-30L USB 2M CABLE BLACK-固定式-惠尔丰定制		DOCUMENT REV	MTL QTY 0	MFG. 0	PRCH. 0